





## DALI/PUSH

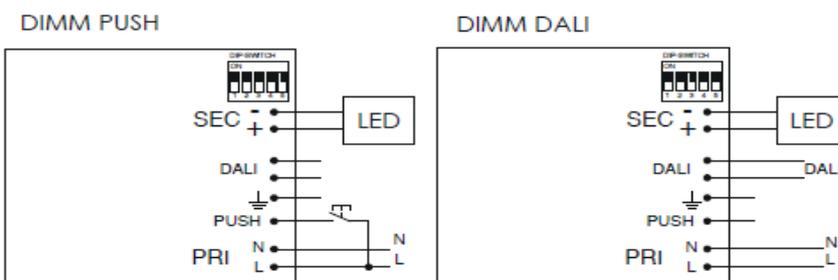

### Caractéristique produit :

- Tension : 220-240 V
- Fréquence : 50/60 Hz
- Température utilisation : -20 à +45°C
- Boitier : plastique
- Gradable : oui

- Dimensions : 123x79x30 mm
- Poids : 0.3 Kg



Référence	W	Tension de sortie	Courant de sortie	Tension de sortie max	IP
<b>8266714050</b>	11-38W	15-55 V	700 mA	80 V	IP20
	14-50W	15-55 V	900 mA		
	16-50W	15-48 V	1050 mA		
	18-50W	15-42 V	1200 mA		
	21-50W	15-36 V	1400 mA		

EN 61347-1:2008+A1+A2, EN 61347-2-13:2006-08, EN 55015:2006+A1+A2, EN 61547:2009, EN 61000-3-2:2006+A1+A2, EN 61000-3-3:2008, EN 61000-4-11:2004, EN 61000-4-2:2009, EN 61000-4-3:2006+A1+A2, EN 61000-4-4:2004, EN 61000-4-5:2006, EN 61000-4-6:2009, EN 61000-4-8:2010