




## Projecteur Flood LED Eco – IP65




### Caractéristiques générales :

- 220-240V
- 50/60Hz
- SMD LED
- Facteur de puissance : 0.9
- IRC : 70+
- Durée de vie : L70 – 35000h
- T° de fonctionnement : -20/+40°C
- Fixation par lyre. Orientable à -45/+90°



H [m]	D [m]	100W		150W		200W		400W		600W		Beam Angle 110°	
		Max [lux]	Med [lux]	Max [lux]	Med [lux]	Max [lux]	Med [lux]	Max [lux]	Med [lux]	Max [lux]	Med [lux]		
1.50	3.93	1494	462	2128	658	2809	869	5617	1738	8426	2607		
3.00	7.87	374	116	532	165	702	217	1404	435	2107	652		
4.50	11.80	166	51	236	73	312	97	624	193	936	290		
6.00	15.73	93	29	133	41	176	54	351	109	527	163		
7.50	19.67	60	18	85	26	112	35	225	70	337	104		

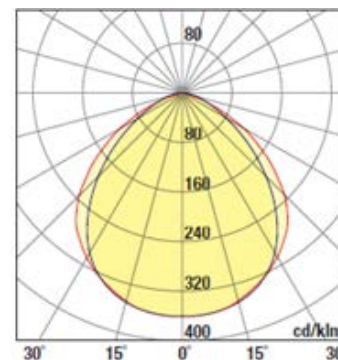

REF	[W]	[lm] LED	[lm] OUT	[lm/W] OUT	[K]	CRI		 AxBxH
8291066406	100	11000	8500	85	6000	70+	110°	280X310X100
8291066404								4000
8291566406	150	17000	12000	80	6000	70+	110°	360x375x120
8291566404								4000
8292066406								200
8294066406	400	46200	32000		6000			540X550X190