



FICHE TECHNIQUE

Lanterne Induslux

CTT/Multi -Puissance

CARACTÉRISTIQUES :

Classe I, IP65, IK10

Corps en aluminium moulé

Installation en suspension

Protection contre les surtensions

Gradable avec variateur 1-10V

CTT : 4000/5000k

Multi-puissance

IRC >80



	W_{LED}	W_T		ϕ_{LED}	ϕ_T				
1056296900	54W	60W	400mA	8.652lm	8.400lm	4	5	4.000-5.000K	Ø240 x 165mm
	72W	80W	500mA	11.536lm	11.200lm	4	5	4.000-5.000K	
	92W	100W	600mA	14.120lm	14.000lm	4	5	4.000-5.000K	
1056297060	72W	80W	520mA	11.536lm	11.200lm	4	5	4.000-5.000K	Ø280 x 165mm
	111W	120W	600mA	17.304lm	16.800lm	4	5	4.000-5.000K	
	138W	150W	750mA	21.630lm	21.000lm	4	5	4.000-5.000K	
1056297130	92W	100W	700mA	14.120lm	14.000lm	4	5	4.000-5.000K	Ø320 x 165mm
	138W	150W	850mA	21.230lm	21.000lm	4	5	4.000-5.000K	
	186W	200W	1.000mA	28.840lm	28.000lm	4	5	4.000-5.000K	



FICHE
TECHNIQUE


Lanterne Industlux

CTT/Multi -Puissance


Dimensions



100W

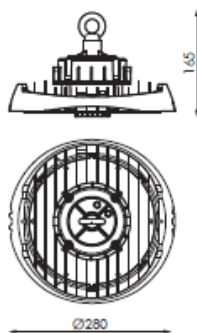


150W

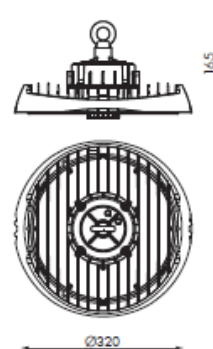

200W

Photométrie

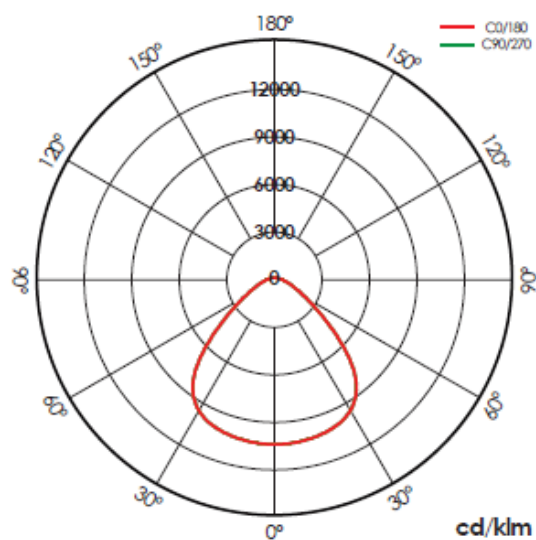

150W 90°